

PCB LAYOUT

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	-
额定电流	Rated Current [A]	20	-	-
接线范围	Wire Range	22-12		
单/多芯线	Solid/Stranded	AWG#		

IEC 技术参数
IEC Technical Data

额定电压	Rated Voltage [V]	250
额定电流	Rated Current [A]	24
耐电压	Withstanding Voltage [V/1Min]	2000V/1Min
导线截面积	Conductor cross section	2.5
硬质/柔性导线	Sold/ flexible	[mm ²]

材料
Material

绝缘材料	Insulation Material	PA66
阻燃等级	Inflammability	UL94V-0
导体材料	Contact Material	铜合金 Copper alloy
导体表面镀层	Contactive Coating	镀锡 Tin Plated

一般参数
Other Data




间距 Pitch	[mm]	6.35
极数 Poles	[P]	02-24
剥线长度 Stripping Length	[mm]	-
螺丝 Screw/扭矩 Torque(Nm)	[N.m]	M3.0/8
工作温度 Operating temperatur	[°C]	-40~+105
引脚尺寸 Pin Dimensions	[mm]	4.1
PCB板孔径 PCB Hole Diameter	[mm]	1.6

SURFACE:

NAME: 宁波三安电子科技有限公司
Santian Electrical Technology Co., Ltd

MODEL: SA635-6.35-XXP-1Y-1000A&Z(H)

MATERIAL:	
MAT NO.:	
STATUS:	
APPD:	
CHKD:	
DRT:	
SIZE: A4	
TYPE:	
SCALE:	
DRAWING NO.:	
REV	
SHEET	1/1

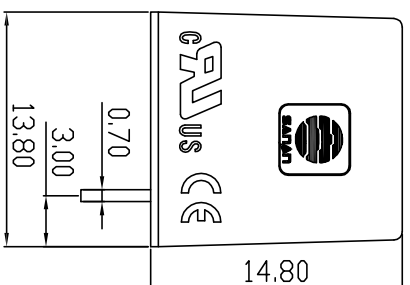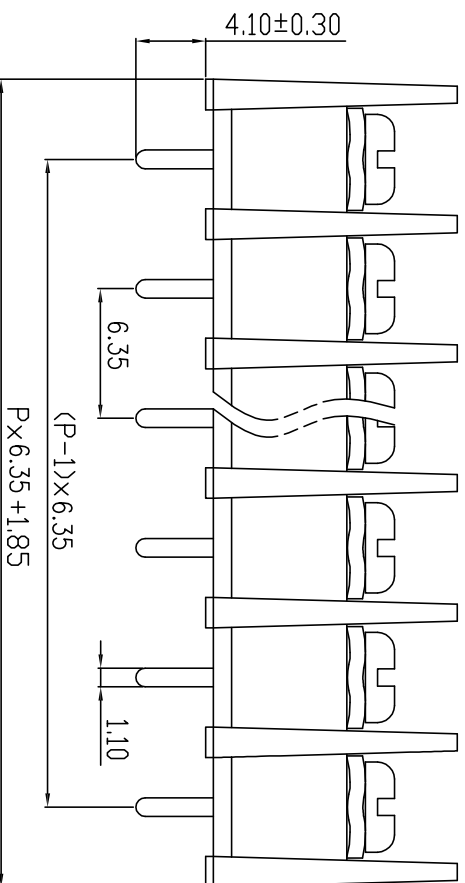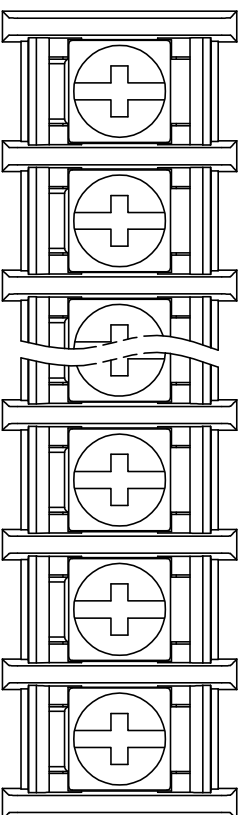

公差 (General)	tolerances (mm)
0	>3
~	>6
~	>10
~	>18
~	>30
~	>50
~	>80
~	>120
~	>180
~	>250
~	>315
~	>400
~	>500
±Z'	

0.1/10
±Z'